

REACH WALK IN VAN


GVWR	12,000 lbs.
PAYLOAD (preliminary)	12ft. @ 3,408 lbs./14ft. @ 3,267 lbs.
GAWR	
Front	5,360 lbs.
Rear	8,840 lbs.
FRONT AXLE CAPACITY	6,830 lbs.
REAR AXLE CAPACITY	11,020 lbs.
Ratio	5.125
SUSPENSION F/R SPRINGS	Tapered/Multi-Leaf
Capacity	6,830/9,880 lbs.
FRAME	
Section Modulus	6.07 in. ³
Resistance Bending Moment	267,080 lb.-ft./in.
SERVICE BRAKES	Vacuum/Hydraulic with 4-Channel ABS
Front/Rear	Disc/Drum
EXHAUST BRAKE	Standard
TRANSMISSION	Aisin A460 6-speed auto. with double overdrive and lock-up 2 nd -6 th gears
ENGINE	Isuzu 4JJ1-TC turbocharged intercooled diesel
Displacement	3.0L (183 in. ³)
Engine Power	150hp @ 2,800 rpm
Engine Torque	282 lb.-ft. @ 1,600-2,800 rpm
Oil Level Indicator	Dash-mounted oil level check switch and light
LIMITED SLIP DIFFERENTIAL	Optional
ALTERNATOR	140-amp
BATTERIES	2 Maintenance-free 750-CCA
TIRES	215/85R16E (10-ply)
STEERING	Integral hydraulic power
STEERING COLUMN	Tilt column
FUEL TANK	25 Gallon in-rail
FUEL/WATER SEPARATOR	Dual fuel filter with dash-mounted indicator light




Reach™ Specifications

REACH BODY DIMENSIONS

Dimension	Description	12'	14'
A	Cargo Floor Length	150.9"	171.0"
B	Behind Rear Axle	69.8"	89.9"
C	Overall Length	260.9"	281.0"
D	Wheel Base	151.0"	151.0"
E	Bulkhead to Axle	94.6"	94.6"

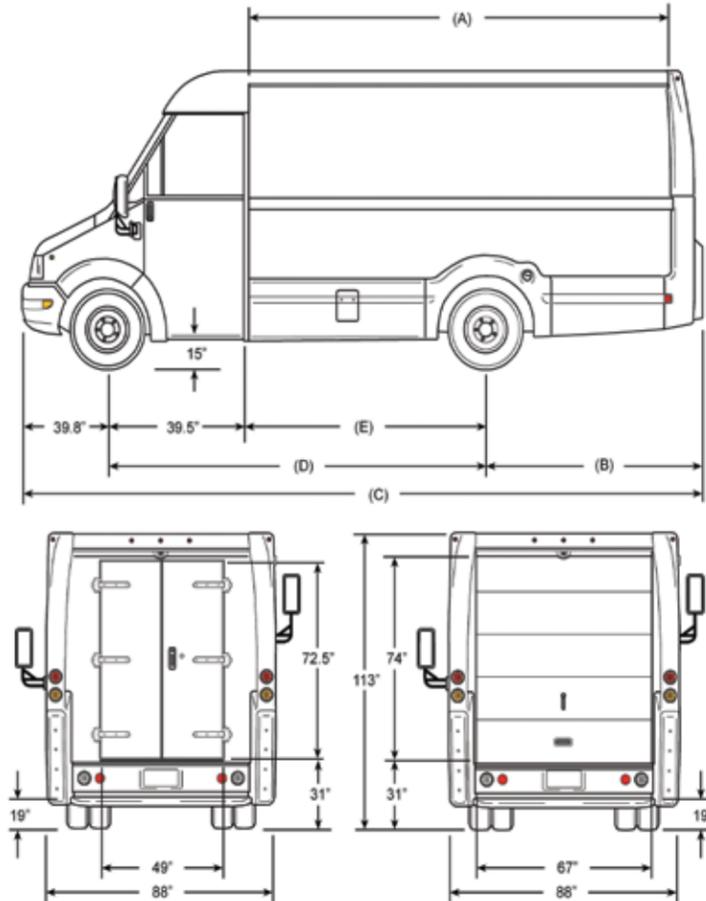


TURNING RADIUS

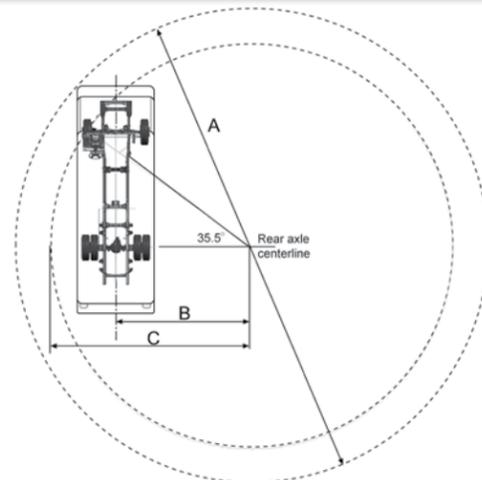


DIM A	DIM B	DIM C
46 ft.	182.26 in.	263.58 in.

12 Ft. Body

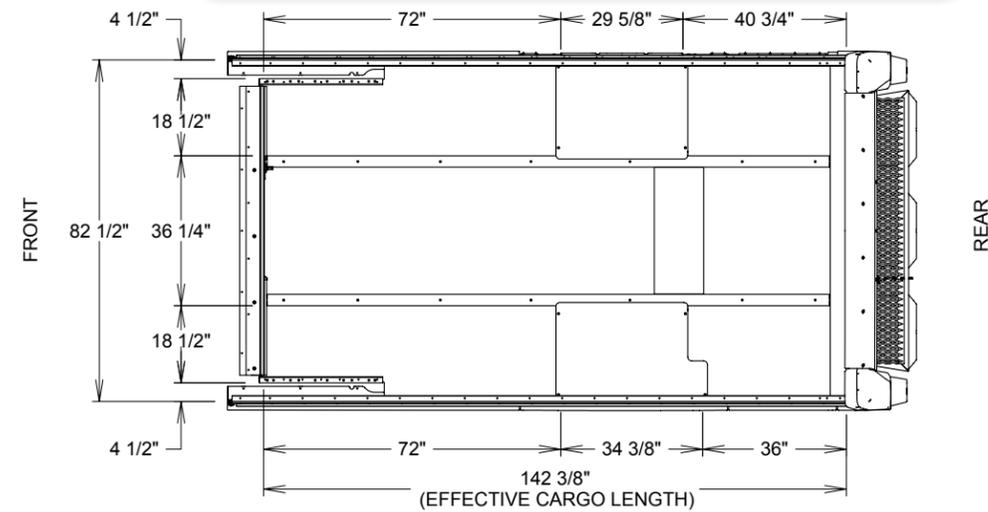

14 Ft. Body

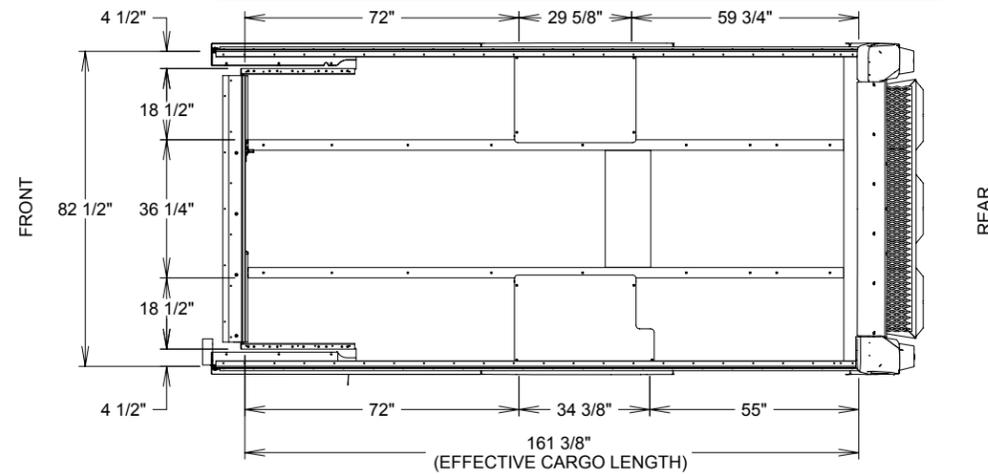

Utilimaster, the vocational expert, offers pre-designed trade packages for installation by your Isuzu dealer. The same professional grade packages can be factory installed into your Reach van at the time of manufacture. These solutions are modular and provide complete flexibility for rental applications or changing route conditions. Trade packages can be quickly removed and easily reinstalled with simple quarter turn fasteners. Choose from pre-designed trade packages or allow the productivity experts at Utilimaster to custom design a package for your operation.

Build Your Module FLOORPLAN WORK-SHEETS

