ULTIMATE OWNERSHIP EXPERIENCE

Ultimate Ownership Experience is our commitment to our customers.

HINO EDGE

Hino Trucks is raising the bar once again in customer ownership experience with the introduction of Hino Edge, the company's all-new, third generation connected vehicle solution. Hino Edge synergizes the digital connection between the fleet customer, dealer network, Telematics Service Providers, and Hino Ultimate Support Center, to provide customrers a competitive edge.

HINOWATCH

24/7 Roadside Assistance is standard for 3 years, unlimited miles, on all Hino Trucks. HinoWatch also provides support for lockout, out of fuel, battery jumpstart, and warranty towing.

HINOCARE

Preventive maintenance saves money and increases uptime across your entire fleet. HINOCARE multi-year programs mean you can match your needs with your long term goals for cost management.

5 YEAR TRANSMISSION WARRANTY

Hino Trucks' L Series and the XL Series offers a five year warranty when purchased with the Allison transmission compared to three/four years standard. That means up two extra years of warranty, unlimited mileage, free of charge. (Applies to MY20 and newer).

Allison R/S Transmission, two years extension

Allison H/S Transmission, one year extra extension.

INCLUSEV

EV ENABLEMENT INCLUSEV has brought together the industry's top experts in everything EV. Unified, we're able to deliver everything needed to electrify fleets. Includes EV Trucks, charging stations, EV infrastructure. construction, end-to-end financing and operations support. This is the definition of "Turn Key" and you get to do it with some of the best partrers in the EV market.

WARRANTY COVERAGE

MY24 HINO L SERIES TRUCK - L6 / L7

DESCRIPTION	STD/OPT	MONTHS	MILEAGE
BASE VEHICLE WARRANTY Provides warranty coverage against defects in material and workmanship. Includes towing to the nearest Hino dealer for warrantable failures. Adjustments and expendables items are covered for 90 days / 3,000 miles. Batteries are covered for 12 months/unlimited mileage.	STD.	24	UNLTD.
ENGINE AND AFTERTREATMENT SYSTEM WARRANTY The base warranty for Cummins B6.7 is 3 years / unlimited mileage and covers virtually everything, including parts and labor on warrantable failures. *For details about the B6.7, see your local Hino dealer, or visit cummins.com.*	STD.	36	UNLTD.
EXTENDED ENGINE WARRANTY - 3 TO 7 YEARS (OPTIONS) Extended coverage plans are available with options for up to 7 years or 300,000 miles on all registered parts and labor. *Most popular plan options shown, for details about the B6.7, see your local Hino dealer, or visit cummins.com.*	OPT. OPT. OPT. OPT. OPT. OPT.	60 60 60 72 72 72	200,000 250,000 300,000 150,000 200,000 250,000
EPA BASE EMISSIONS SYSTEM WARRANTY - 5 YEARS/100,000 Miles Provides warranty coverage against defects in material and workmanship for all components that comprise the emissions system. CARB Certified engine emissions warranty of 5 year/ 150,000 miles.	STD.	60	100,000
EXTENDED AFTERTREATMENT SYSTEM WARRANTY UP TO TO 6 YEARS (OPTIONS) Options range from 3 to 6 years and 100,000 to 250,000 miles. Mileage range options may vary by engine and length of coverage. *Most popular plan options shown, for details about the B6.7, see your local Hino dealer, or visit cummins.com.*	OPT. OPT. OPT. OPT. OPT. OPT.	60 60 60 72 72 72	200,000 250,000 300,000 150,000 200,000 250,000
FRAME RAILS & CROSS MEMBERS Provides warranty coverage against structural cracks in the frame caused by defects in material and workmanship	STD.	60	UNLTD.
CAB Provides warranty coverage against corrosion perferation of the cab structure.	STD.	60	UNLTD.
ALLISON AUTOMATIC TRANSMISSION- 5 YEARS (STANDARD) Limited Warranty includes 100% parts and labor for the coverage period. Repairs are performed at Allison Authorized Dealers.	STD.	60	UNLTD.
ANTI-LOCK BRAKING SYSTEM (ABS) AIR/HYDRAULIC ABS control module, modulator valves, and wheel sensors.	STD.	36	300,000

OPT. - Optional Warranties can be purchased from an authorized Hino Trucks Dealer. Hino Trucks reserves the right to amend all warranty terms and conditions.

HINO TRUCKS
A Toyota Group Company

POWERON.

L SERIES
MY24 - L6/L7

The Hino Trucks' conventional models have been the fastest growing medium duty trucks for years. It started with great aerodynamics, functionality, durability, and has continued to develop their telematics services, Hino Edge, which is among the best telematic service in the indstry. The Hino Trucks L Series sports an automotive grade interior, a host of new advanced safety equipment, and larger cab configurations for more versatility than ever before.

Available in day, extended, and crew cab configurations Hino Trucks L Series trucks are ideal for applications ranging from 23,000 to 33,000 lbs. GVWR. - POWER ON.

HINO TRUCKS
A Toyota Group Company

Hino Trucks - A Toyota Group Company
45501 12 Mile Road, Novi, Michigan 48377

MY24LSERIES_0223

HINO.COM

Hino Trucks' standard 80,000 PSI frame is among the strongest in the industry, but we also offer an optional 120,000 PSI frame (L7 only) to maintain integrity in the most rugged applications.

Hino Trucks provides extra-wide door openings, large step surfaces and grab handles to keep drivers safe, but in today's world, that's not enough. With the Hino Active Safety Suite, drivers are safer with the integration of today's cutting edge camera and radar technologies.

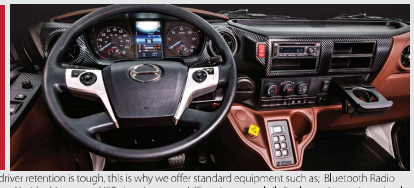

We know driver retention is tough, this is why we offer standard equipment such as; Bluetooth Radio w/CD player, Air ride drivers seat, USB charging port, A/C, cruise control, tilt & telescopic steering wheel will help. That's why it's STANDARD.

Part of what makes the L Series great for so many applications is maneuverability and visibility. 55 degree wheel cut is perfect for tight spots in the inner city and a 2,385 sq/in windshield helps drivers see through their work day.

L SERIES - SPECIFICATIONS

ENGINE/DRIVETRAIN/AXLE	
Engine model	Cummins B6.7L (EPA 2021 certified)
Type	Diesel 4 cycle, 6 cylinder in-line, water-cooled, parent bore cylinder
Turbocharger	Variable Geometry Turbocharger w/integrated engine braking
Fuel System	Bosch Common rail, direct injection
Bore & Stroke	4.21 in. x 4.88 in.
Max. output @ 2,500 rpm	240-260hp
Max. torque @ 1,500 rpm	560-660 lb-ft.
Emissions system	EGR with Single Module Aftertreatment
Transmission	Allison six speed automatic with neutral at stop (NAS)
Driveline	Dana Spicer HD
Front axle	Meritor MFS series reverse Elliot, "I" beam (oil lubricated)
Rear axle	Meritor, full floating, single reduction, single-speed, hypoid gearing

ELECTRICAL EQUIPMENT	
Batteries	☐ STD Two, parallel connection, 1200 CCA (GR 31)
	☐ OPT Multiple two battery choices
	☐ OPT Multiple three battery choices
Alternator	☐ STD 12V, 130A, Delco (brush)
	☐ **OPT 12V, 135A (brushless)** ☐ **OPT 160A (brush)** ☐ **OPT 200A (brush)**
Starter	Delco Remy 31MT 12V, 4.1kw

TANKS	
Fuel Tank	☐ STD 50 gallon
	☐ OPT Dual 50 gal. ☐ OPT Single 70 gal. ☐ OPT Single 90 gal.
DEF tank	7.4 gallon

☐ DAY CAB (Seats 3) BBC: 108"

☐ EXTENDED CAB (Seats 5) BBC: 138"

☐ CREW CAB (Seats 6) BBC: 152.8"

Wheelbase (in.)	☐ 152	☐ 175	☐ 187	☐ 205	☐ 212	☐ 217	☐ 235	☐ 242	☐ 253	☐ 271	☐ 301
Cab to axle (in.) Day	84.6	101.6	119.6	137.6	144.6	149.6	167.6		185.6	203.6	233.6
Extended								144.6	155.6		203.6
Crew									140.8		

☐ L6 GVWR: 23,000-25,950 LBS.

WEIGHT CAPACITIES
Front axle range: 8,000-12,000 lbs. Rear axle range: 17,500-19,000 lbs.

Engine HP	☐ Cummins B6.7L 240hp	☐ Cummins B6.7L 260hp
Transmission model	☐ STD 2200HS ☐ STD 2200RDS	☐ OPT 2500HS ☐ OPT 2500RDS
Brakes	☐ STD Hydraulic disc	☐ OPT Air S-Cam drum ☐ OPT Air disc*
Front axle/susp. lbs.	☐ STD 8,000	☐ OPT 10,000/12,000
Rear susp. type	☐ STD Multi leaf spring	☐ OPT Hendrickson Comfort Air with electric dump valves
Rear axle/susp. lbs.	☐ STD 17,500/19,000	☐ OPT 19,000/19,000
Rear axle ratio	☐ STD- 5.29 (23k GVWR) ☐ STD 5.57 (26k GWR)	☐ STD 4.11 (25.5k GVWR)
Wheel size	☐ STD 22.5"	☐ OPT 19.5"
Wheel type	☐ STD Powder coated white	☐ OPT Aluminum Accuride or Alcoa
Frame yield strength	80K PSI (1.0 M RBM)	

☐ L7 GVWR: 33,000 LBS.

WEIGHT CAPACITIES
Front axle range: 10,000-14,000 lbs. Rear axle range: 21,000-23,000 lbs.

Engine HP	Cummins B6.7L 260hp	
Transmission model	☐ STD 2500RDS ☐ OPT 2500HS	☐ OPT 3000RDS ☐ OPT 3500RDS
Brakes	☐ STD Air S-cam drum	☐ OPT Air disc**
Front axle/susp. lbs.	☐ STD 12,000 ☐ OPT 10,000	☐ OPT 13,200 ☐ OPT 14,000
Rear axle/susp. lbs.	☐ STD 21,000	☐ OPT 23,000
Rear axle ratio	☐ STD 5.57 (33k GVWR)	
Rear suspension	☐ STD Multi leaf spring	☐ OPT Hendrickson Comfort Air
	☐ OPT 4,500 lb. aux rubber spring (23K axle only)	☐ OPT Hendrickson 23K Severe Duty Air with electric dump valves
Wheel type (22.5")	☐ STD Powder coated white	☐ OPT Aluminum Accuride or Alcoa
Frame yield strength	☐ STD 80K PSI (1.0 M RBM)	☐ OPT 120K PSI (1.9M RBM)

Not all equipment combinations are compatible. For compatibility, additional options and specifications please visit your local Authorized Hino Trucks Dealer. Are you a body company? Additional information @ hinobodybuilder.com

HINO TRUCKS
A Toyota Group Company

L SERIES POPULAR OPTIONAL EQUIPMENT

- ☐ Allison FuelSense Plus/Max
- ☐ Anti-siphon device insert in fuel tank
- ☐ Back-up alarm
- ☐ Cab paint, exterior - custom (factory)
- ☐ Engine idle shutdown
- ☐ Exhaust system - vertical stack type
- ☐ Mirrors, fender mounted-chrome (both sides or passenger only)
- ☐ Mirrors, outside rearview-chrome
- ☐ Mirrors-power heated (available in chrome)
- ☐ Onguard Plus Optional
- ☐ 15.5 Gallon DEF Tank
- ☐ Power windows and door locks (available with keyless entry)
- ☐ Programmable speed limit 65,70 mph
- ☐ Rear helper spring-sub leaf type
- ☐ Stabilizer bar, rear (leaf suspension only)
- ☐ Trailer brake package
- ☐ Battery disconnect & jump start station
- ☐ Rear axle ratio - L6 - 5.13, 5.29, 4.33, 4.63, 4.88* - L7 - 4.88, 5.29, 5.86, 6.14*
- ☐ Full LED Headlights including high/low beams, daytime running and indicator lights

- ☐ Hino Active Safety Suite



* Available on select GVWR All features and options are subject to change without notice.
**For more model specifications, contact your local Hino Trucks dealer.

Legal Disclaimer
The equipment and specifications shown are subject to change without notice. The information, content, and materials are presented "as is" at the time of publication, and no representations are made that the content is error-free. ©Hino Motors Sales U.S.A., Inc. All rights reserved. All other marks are trademarks of their respective owners.